

INELASTIC RESPONSE OF MASONRY INFILLED REINFORCED CONCRETE STRUCTURES

Alkis Fotos¹, Filippos Foskolos¹, Athanasios K. Tsaris¹, Constantinos C. Repapis²,
Panagiotis G. Asteris¹

¹ Computational Mechanics Laboratory, School of Pedagogical and Technological Education
Heraklion, GR 14121, Athens, Greece
panagiotisasteris@gmail.com

² Department of Civil Engineering, Piraeus University of Applied Sciences
250 Thivon and Petrou Ralli Str., Aigaleo 122 44, Athens, Greece
crepapis@puas.gr

Keywords: Inelastic Analysis, Infill walls, Masonry, Mathematical Modeling, Pushover Analysis, Reinforced Concrete, Seismic Response.

Abstract. *It is well known that masonry infill walls, although non-engineered and considered as non-structural, may provide most of the earthquake resistance and prevent collapse of relatively flexible and weak RC structures. The objective of this study is to investigate the effect of masonry infill walls with openings on the performance of reinforced concrete frames under lateral loads. Specifically, this study is concerned with the evaluation of inelastic parameters of masonry infilled reinforced concrete buildings. Buildings with various heights are selected and designed according to EC8. Inelastic pushover analyses are performed and local and global strength and inelastic deformation characteristics are evaluated. The influence of various parameters, such as the number of storeys, the distribution of infill walls, their strength and their opening percentage on the seismic response of the buildings is thoroughly examined. The results from nonlinear pushover analyses indicate that the overstrength and ductility of RC buildings can be higher than the values considered in the design. The presence of infill walls increases considerably the stiffness of the structures and their global resistance to lateral loads. However, the irregular distribution of infills (soft storey – case of pilotis) significantly reduces the capacity of the structure.*

1 INTRODUCTION

Reinforced concrete (RC) frames with unreinforced masonry infill walls are commonly used worldwide. Masonry infill walls are non-structural elements and are usually ignored in the design of the structures. However, the infill walls significantly influence the seismic response of a structure since they may interact with bounding frames when the structure is subjected to strong lateral loads induced by seismic load. In many cases infills may provide most of the earthquake resistance, improve the behaviour of the structure and prevent collapse of relatively flexible and weak RC structures. Nevertheless, an irregular distribution of infill walls may have negative effects on the structure's performance.

There is a complex interaction between primary structures and masonry infill panels and it is well known that in the presence of lateral actions masonry infills partially detach from the surrounding frame, remaining in contact with this only in correspondence of two opposite corners. A significant bracing action, affecting both the strength and stiffness, originates by this mechanism, as demonstrated by a large number of experimental investigations [1-13] and analytical-numerical studies [14-32]. However, despite several modelling strategies available in the literature, going from pinned equivalent struts macromodeling to FE micromodeling [33-38], masonry infills are generally not accounted for in models because of the large amount of uncertainties arising during their structural identification.

In this study, the effect of masonry infill walls with openings on the performance of reinforced concrete frames under lateral loads is investigated using inelastic pushover analyses. To this end, buildings with various heights and infill wall opening percentages are selected.

2 DESCRIPTION OF THE STRUCTURES

2.1 Building forms and infill walls parameters

In this study, the seismic response of masonry infilled reinforced concrete buildings is investigated. Buildings examined have 4, 6, 8 and 10 storeys. The storey height for all buildings is kept constant and equal to 3.0 m. All buildings have 4 spans with 6 m length. In the perpendicular direction the span length has been kept constant and equal to 5 m for all cases.

Both bare-frame structures as well as structures with fully or partially unreinforced masonry infilled frames with or without openings are analysed, in order to examine the influence of infill walls. Infill panels are 0.25 m thick, following the conventional construction double leaf walls with a masonry panel strength equal to 3.0 MPa, which represents a good clay masonry. Young's modulus E_w of masonry is 3.0 GPa. Four different cases for infill wall openings are studied. These are: fully infilled walls (0% openings), infill walls with small and large openings (25% and 50% openings) and bare frames (100% openings). Infill walls are uniformly distributed in all spans of the frame. Moreover, the case of an open storey at the ground floor (pilotis) is examined for each infilled frame.

In total, 28 different cases of infilled RC frames were analysed in order to investigate the influence of several parameters on the seismic response of infilled frame structures.

2.2 Design of structures

The frames are designed according to Eurocode standards using the software FESPA [39]. Modal response spectrum analysis was also performed. The frames were designed for seismic zone I with reference peak ground acceleration on type A ground, $a_{gR} = 0.16$ g, importance factor γ equal to 1.0, ground type B with soil factor S equal to 1.2, according to Eurocode 8, medium ductility class (DCM) and behaviour factor, q , equal to 3.45. Concrete strength class C25/30 was used for beams and columns, while steel grade B500c was used for the rein-

forcement steel bars. The dead load was 1.50 kN/m^2 plus 0.90 kN/m^2 to include interior partition walls in the mass of the building. Live load was 3.5 kN/m^2 . Slabs were 150 mm thick for all cases. Beams were $250/600 \text{ mm}$ for all frames. Square column sections were used for all frames. For the 10-storey frame, columns had dimensions ranging from $650 \times 650 \text{ [mm]}$ at the ground floor to $500 \times 500 \text{ [mm]}$ at the roof. For the 4-storey frame, column dimensions are $550 \times 550 \text{ [mm]}$ at the first three storeys and $500 \times 500 \text{ [mm]}$ at the roof. Column longitudinal reinforcement ratio was kept low and ranged between 1.0% and 1.5% , with most cases being under 1.15% .

3 MODELLING OF INFILL STRUCTURES

3.1 Modelling of infill walls

The response of composite infilled framed structures is modelled using diagonal compressive struts with appropriate geometrical and mechanical characteristics (Figure 1). As it is widely accepted, diagonal struts can adequately model the inelastic behaviour of infills with low computational cost. In Figure 1, w is the width of the diagonal strut, d is the diagonal length of the masonry panel, L is the distance between the centres of two columns, and z is the contact length of the diagonal strut to the column.

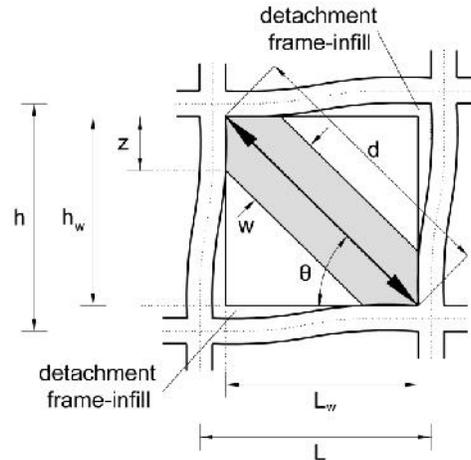


Figure 1: Masonry infill frame sub-assembly.

Mainstone and Weeks [40] and Mainstone [41] based on experimental and analytical data, proposed the following empirical equation for the calculation of the equivalent strut width w , which was later included in FEMA-274 [42] for the analysis and rehabilitation of buildings as well as in FEMA-306 [43]:

$$\frac{w}{d} = 0.175 \} _h^{-0.4} \quad (1)$$

where d is the diagonal length of the masonry panel and $\} _h$ is given by the following equation,

$$\} _h = h \sqrt[4]{\frac{E_w t_w \sin 2\alpha}{4EI h_w}} \quad (2)$$

where E_w is the modulus of elasticity of the masonry panel, EI is the flexural rigidity of the columns, t_w the thickness of the infill panel and equivalent strut, h the column height between

centerlines of beams, h_w the height of infill panel, and θ the angle, whose tangent is the infill height-to-length aspect ratio, being equal to:

$$\theta = \tan^{-1}\left(\frac{h_w}{L_w}\right) \quad (3)$$

where L_w is the length of infill panel. All the above parameters are explained in Figure 1.

In case of openings in the infills, the infill wall stiffness can be multiplied with the following reduction factor λ , proposed by Asteris [44]:

$$\lambda = 1 - 2\alpha_w^{0.54} + \alpha_w^{1.14} \quad (4)$$

where α_w is the ratio of the area of opening to the area of infill wall. The above coefficient is used in the current study to find the equivalent width of a strut for the case of an infill with opening by multiplying the width obtained using Eq. (1) by the relevant reduction factor.

3.2 Modelling of RC structures

All buildings were modelled as plane frames using Seismostruct [45]. A plastic-hinge element has been adopted for beams and columns, with concentrated inelasticity within a fixed length at each member's end. The Mander et al. [46] model, later modified by Martinez-Rueda and Elnashai [47], has been assumed for the core and the unconfined concrete, while Menegotto-Pinto steel model has been adopted for the reinforcement steel [48]. Concrete compressive strength was equal to 25 MPa and the yield strength of the steel equal to 500 MPa. Mass was calculated using the seismic load combination, namely dead loads plus 30% of the live loads.

Masonry is modelled using the inelastic infill panel element. This is an equivalent strut nonlinear cyclic model proposed by Crisafulli [49] for the modelling of the nonlinear response of infill panels in framed structures. Each panel is represented by six strut members. Each diagonal direction features two parallel struts to carry axial loads across two opposite diagonal corners and a third one to carry the shear from the top to the bottom of the panel (Figure 2). The struts act only across the diagonal that is on compression, hence, its "activation" depends on the deformation of the panel. The axial load struts use the masonry strut hysteresis model, while the shear strut uses a dedicated bilinear hysteresis rule, as described by Crisafulli [49].

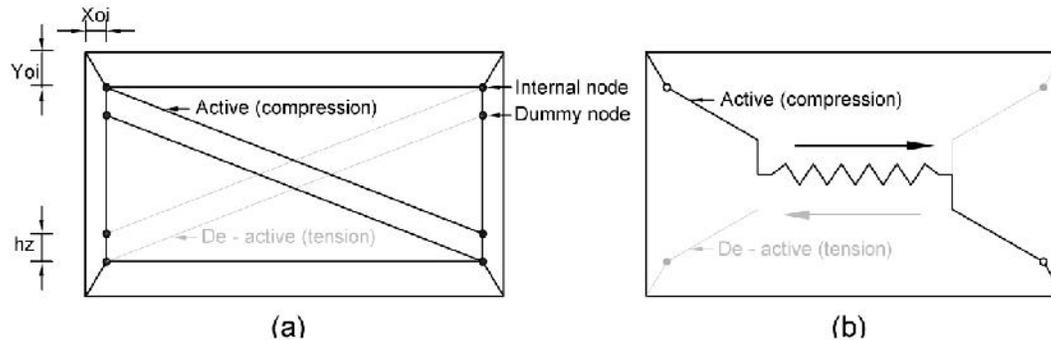


Figure 2: Infill panel element proposed by Crisafulli [49]. a) Compression/Tension Struts, b) Shear Strut.

3.3 Performance criteria

Local or global failure definition criteria are adopted, in order, to estimate the limiting lateral deformation capacity and corresponding limit resistance, global deformability and ductility of the infilled RC structures. In the present study, it is assumed that local failure occurs

only when a column fails, thereby, assuming that beam failure cannot cause a brittle catastrophic type of failure of the entire structure, due to the expected redistribution of loads that takes place in this case. The following criteria are evaluated for every structure:

- local inelastic rotation capacities at the end critical regions of beams and columns according to EC8-3,
- local shear force capacity of the individual members according to EC8-3 and
- failure of the compression struts of the infill masonry walls for the infilled frames

3.4 Target Point

Target displacement is evaluated according to EC8 procedure for three performance levels. The idealized elasto-perfectly plastic force displacement relationship is determined in such a way that the areas under the actual and the idealized force deformation curves are equal and the yield force of the idealized system is equal to the base shear force at the formation of the plastic mechanism.

4 INELASTIC ANALYSES

Pushover analyses with two distributions of lateral loads (uniform and triangular) were performed for all the frames. The predicted base shear – roof displacement characteristics are shown in Figures 3 to 6. On each capacity curve, the bilinear approximation and the target point for limit state of significant damage (SD) are also shown. In this study, failure is considered when at least one of the performance criteria described above is reached.

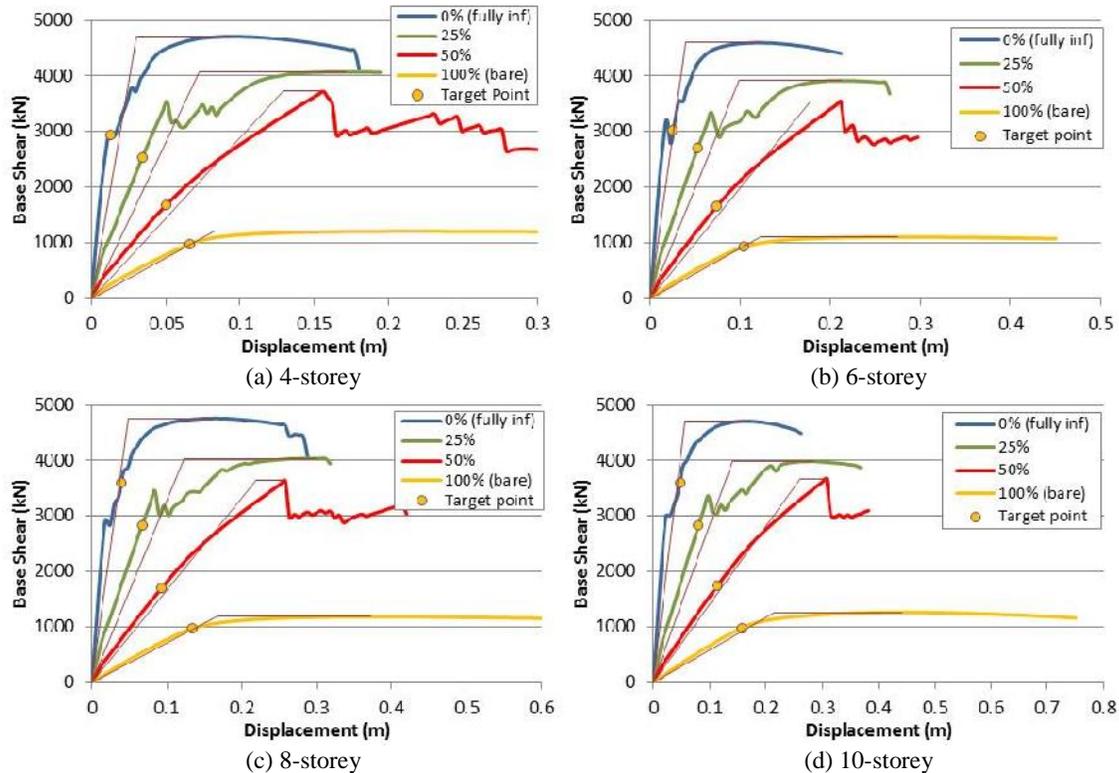


Figure 3: Capacity curves of examined frames.

In Figure 3 the capacity curves of frames with 4, 6, 8 and 10 storeys are shown, for the fully infilled frame (0% openings), the frames with 25% and 50% infill opening ratios and the

bare frame (100% openings). As expected, masonry infills significantly influence the seismic response of the frames. For fully-infilled frames, the stiffness of the frame increases considerably compared to the bare frame. This increase is smaller for frames with 25% and 50% opening ratio. As also shown in previous studies [50-51] for opening ratios above 80% the influence is insignificant.

Total displacement and interstorey drifts of the infilled frames decrease compared to bare frames. Target displacement also decreases. Consequently, both ductility capacity and demand decrease with the presence of infill walls. On the contrary, overstrength significantly increases with the presence of infill walls. The capacity strength of the examined fully-infilled frames increased by 374% to 417% compared to the strength of the bare frames. However, after the failure of the infills the strength reduces.

The capacity curves of the bare frames and the fully-infilled frames with different number of storeys are shown in Figure 4. It can be seen, that higher frames have smaller initial stiffness and higher target displacement for both bare and infilled frames. The predicted base shear – roof displacement characteristics with uniform and triangular lateral loads are compared in Figure 5 for the 6-storey bare and fully-infilled frame. The maximum strength from pushover with uniform lateral loads is higher, while the target displacement is smaller, compared to the capacity curve with triangular distribution of lateral loads.

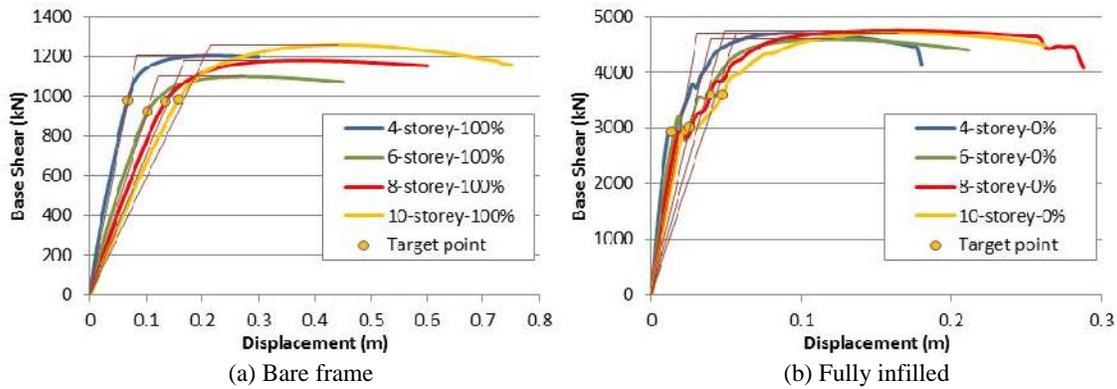


Figure 4: Capacity curves of 4, 6, 8 and 10-storey (a) bare and (b) fully-infilled frames.

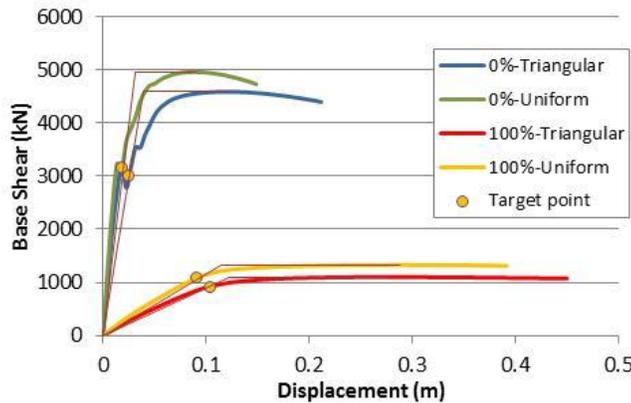


Figure 5: Capacity curves of 6-storey bare and fully-infilled frame with uniform and triangular lateral loads.

Capacity curves for bare, fully infilled frames and frames with soft storey are compared in Figure 6 for the 8 and 10-storey frames. The deformed shape of these frames is shown in Figure 7. In the same figure, the performance criteria are shown for the members of the frames.

Yield is indicated in green, flexural failure in red and shear failure of the members in blue. In the structures with a soft storey at the first floor, infills do not reach their strength degrading branch since inelastic energy absorption concentrates to the columns of the open storey. On the contrary, infills in the lower part of the fully infilled frames do reach their maximum resistance. Fully-infilled frames having regularly distributed infills, exhibit reduced local deformation demands and therefore behave in a desirable manner.

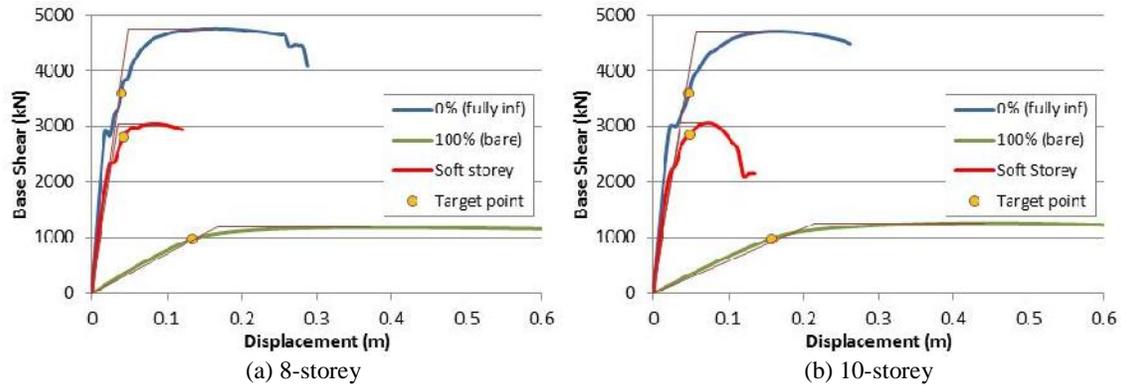


Figure 6: Capacity curves of the 8 and 10-storey bare, soft storey and fully-infilled frame.

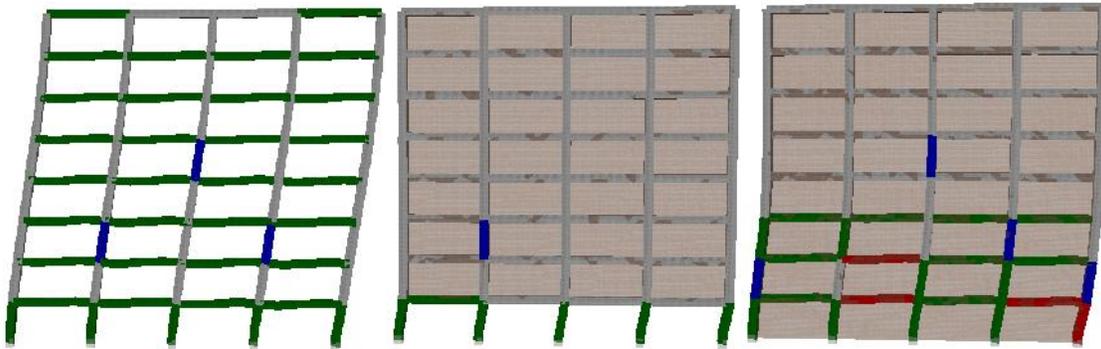


Figure 7: Deformed shape and performance criteria of the 8-storey bare, soft storey and fully-infilled frame (green: yield, red: flexural failure, blue: shear failure).

5 CONCLUSIONS

The influence of the masonry infill walls on the seismic performance of reinforced concrete frames is investigated in this study. Buildings with four to ten storeys are initially designed according to EC8. Static pushover analyses are subsequently performed for bare and infilled frames with various opening ratios. Based on the results of these analyses, the following are concluded:

- Results from static pushover analyses confirm the significant influence of the infills on the seismic response of the structures. Thus, infill walls should be included in the model.
- Infill walls increase the stiffness and overstrength of the structure but reduce its deformability and thus its ductility.
- A non-uniform distribution of infills, like an open first storey, results in a concentration of damage at this storey, creating a soft-storey response mechanism. The irregular distribution of infills significantly reduces the capacity of the structure which necessitates their inclusion

in the structural model. On the other hand, regularly distributed infills significantly reduce the deformation and ductility demand in structural elements, with the frames exhibiting an improved performance.

- As the opening percentage of the infills increases, the stiffness and overstrength decreases and the behaviour of the frame approaches that of the bare frame. For opening ratios above 75% the influence of the infills is insignificant.

REFERENCES

- [1] S.V. Polyakov, On the interaction between masonry filler walls and enclosing frame when loading in the plane of the wall. *Translation in earthquake engineering*, Earthquake Engineering Research Institute, San Francisco, 36-42, 1960.
- [2] A.B. Mehrabi, P.B. Shing, M. Schuller, J. Noland, Experimental evaluation of masonry-infilled RC frames. *ASCE Journal of Structural Engineering*, **122**(3), 228-237, 1966.
- [3] B.S. Smith, Behavior of square infilled frames. *ASCE Journal of the Structural Division*, **92**(ST1), 381-403, 1966.
- [4] B.S. Smith, C. Carter, A method of analysis for infilled frames. *Institution of Civil Engineers*, **44**(1), 31-48, 1969.
- [5] R.E. Klingner, V.V. Bertero, Earthquake resistance of infilled frames. *ASCE Journal of the Structural Division*, **104**(6), 973-989, 1978.
- [6] S.G. Buonopane, R.N. White, Pseudodynamic testing of masonry infilled reinforced concrete frame. *Journal of Structural Engineering*, ASCE, **125**(6), 578-589, 1999.
- [7] M. Dolšek, P. Fajfar, Mathematical modelling of an infilled RC frame structure based on the results of pseudo-dynamic tests. *Earthquake engineering & structural dynamics*, **31**(6), 1215-1230, 2002.
- [8] L. Cavaleri, M. Fossetti, M. Papia, Infilled frames: developments in the evaluation of cyclic behaviour under lateral loads. *Structural Engineering and Mechanics*, **21**(4), 469-494, 2005.
- [9] C.G. Karayannis, D.J. Kakaletsis, M.J. Favvata, Behavior of bare and masonry infilled R/C frames under cyclic loading: Experiments and analysis. *WIT Transactions on The Built Environment*, **81**, 2005
- [10] M.H. Santhi, G.M.S. Knight, K. Muthumani, Evaluation of seismic response of soft-storey infilled frames. *Computers and Concrete*, **2**(6), 423-437, 2005.
- [11] D.J. Kakaletsis, C.G. Karayannis, Experimental investigation of infilled reinforced concrete frames with openings. *ACI Structural Journal*, **106**(2), 132-141, 2009.
- [12] J. Zovki, V. Sigmund, I. Guljaš, Testing of R/C frames with masonry infill of various strength. *Proceedings of the 15th World Conference on Earthquake Engineering*, Lisbon, Portugal, January 2012.
- [13] L. Cavaleri, F. Di Trapani, Cyclic response of masonry infilled RC frames: Experimental results and simplified modelling, *Soil Dynamics and Earthquake Engineering*, **65**, 224-242, 2014.

- [14] C.Z. Chrysostomou, *Effects of degrading infill walls on the nonlinear seismic response of two-dimensional steel frames*. Ph.D. Dissertation, Cornell University, Ithaca, New York, 1991.
- [15] M. Dolšek, P. Fajfar, Soft storey effects in uniformly infilled reinforced concrete frames. *Journal of Earthquake Engineering*, **5**(1), 1-12, 2001.
- [16] C.Z. Chrysostomou, P. Gergely, J.F. Abel, A six-strut model for nonlinear dynamic analysis of steel infilled frames. *International Journal of Structural Stability and Dynamic*, **2**(3), 335-353, 2002.
- [17] P.G. Asteris, Lateral stiffness of brick masonry infilled plane frames. *ASCE Journal of Structural Engineering*, **129**(8), 1071-1079, 2003.
- [18] E. Vintzileou, C. Zeris, C. Repapis, Seismic Behaviour of Infilled Existing RC Buildings, *ICCES'04 Symposium: Earthquake Structural Engineering*, Madeira, Portugal, July 2004.
- [19] P.G. Asteris, Closure to “Lateral stiffness of brick masonry infilled plane frames” by P.G. Asteris. *ASCE Journal of Structural Engineering*, **131**(3), 523-524, 2005.
- [20] C. Repapis, C. Zeris, E. Vintzileou, Evaluation of the Seismic Behaviour of Existing RC Buildings: II. A Case Study for Regular and Irregular Buildings, *Journal of Earthquake Engineering*, Imperial College Press, **10**(3), 429-452, 2006.
- [21] M. Dolšek, P. Fajfar, The effect of masonry infills on the seismic response of a four-storey reinforced concrete frame – a deterministic assessment. *Engineering Structures*, **30**(7), 1991-2001, 2008.
- [22] M. Dolšek, P. Fajfar, The effect of masonry infills on the seismic response of a four storey reinforced concrete frame – a probabilistic assessment. *Engineering Structures*, **30**(11), 3186-3192, 2008.
- [23] P.G. Asteris, Finite element micro-modeling of infilled frames. *Electronic Journal of Structural Engineering*; **8** (8), 1-11, 2008.
- [24] H.A. Moghaddam, Lateral load behavior of masonry infilled steel frames with repair and retrofit. *ASCE Journal of Structural Engineering*, **130** (1), 56-63, 2004.
- [25] D.J. Kakaletsis, C.G. Karayannis, Influence of masonry strength and openings on infilled R/C frames under cycling loading. *Journal of Earthquake Engineering*, **12**(2), 197-221, 2008.
- [26] D. Kakaletsis, Analytical modeling of masonry infills with openings. *Structural Engineering and Mechanics*, **31**(4), 423-437, 2009.
- [27] L. Cavaleri, M. Papia, A new dynamic identification technique: application to the evaluation of the equivalent strut for infilled frames. *Engineering Structures*, **25**(7), 889–901, 2003.
- [28] D. Celarec, P. Ricci, M. Dolšek, The sensitivity of seismic response parameters to the uncertain modelling variables of masonry-infilled reinforced concrete frames. *Engineering Structures*, **35**, 165-177, 2012.
- [29] L. Cavaleri, M. Papia, An output-only stochastic parametric approach for the identification of linear and nonlinear structures under random base excitations: Advances and comparisons. *Probabilistic Engineering Mechanics*, **35**, 11–21, 2014.

- [30] L. Cavaleri, F. Di Trapani, Prediction of the additional shear action on frame members due to infills, *Bullettin of Earthquake Engineering*; **13**(5), 1425–1454, 2015. DOI: 10.1007/s10518-014-9668-z.
- [31] G. Campione, L. Cavaleri, G. Macaluso, G. Amato, F. Di Trapani, Evaluation of infilled frames: an updated in-plane-stiffness macro-model considering the effects of vertical loads. *Bullettin of Earthquake Engineering*, **13**(8), 2265-2281, 2014. DOI: 10.1007/s10518-014-9714-x.
- [32] A.I. Kritikos, G.D. Ntasis, D.G. Zitouniatis, M.E. Lemonis, P.G. Asteris, Lateral response evaluation of steel frame structures with masonry infills, M. Papadrakakis, M. Fragiadakis eds., *6th ECCOMAS Thematic Conference on Computational Methods in Structural Dynamics and Earthquake Engineering (COMPDYN 2017)*, Rhodes Island, Greece, June 15–17, 2017.
- [33] H.A. Moghaddam, P.J. Dowling, *The State of the Art in Infilled Frames*. ESEE Research Report No. 87-2, Imperial College of Science and Technology, Civil Engineering Department, London, U.K, 1987.
- [34] M. Papia, L. Cavaleri, M. Fossetti, Infilled frames: developments in the evaluation of the stiffening effect of infills. *Structural engineering and mechanics*, **16**(6), 675-93, 2003.
- [35] P.G. Asteris, S.T. Antoniou, D.S. Sophianopoulos, C.Z. Chrysostomou, Mathematical macromodeling of infilled frames: State of the art. *ASCE Journal of Structural Engineering*, **137** (12), 1508-1517, 2011.
- [36] P.G. Asteris, D.M. Cotsovos, C.Z. Chrysostomou, A. Mohebkhah, G.K. Al-Chaar, Mathematical micromodeling of infilled frames: State of the art. *Engineering Structures*, **56**, 1905-1921, 2013.
- [37] A. Mohyeddin, S. Dorji, E.F. Gad, H.M. Goldsworthy, Inherent limitations and alternative to conventional equivalent strut models for masonry infill-frames. *Engineering Structures*, **141**, 666–675, 2017.
- [38] Chrysostomou, C.Z., Asteris, P.G. On the in-plane properties and capacities of infilled frames. *Engineering Structures*, **41**, 385-402, 2012.
- [39] LH logismiki. *FESPA 10 for windows*, v.5.4.0.100. Athens, Greece, 2013
- [40] R.J. Mainstone, G.A. Weeks, The influence of bounding frame on the racking stiffness and strength of brick walls. *2nd International Brick Masonry Conference*, Building Research Establishment, Watford, England, 165-171, 1970.
- [41] R.J. Mainstone, Supplementary note on the stiffness and strengths of infilled frames. Current Paper CP 13/74, Building Research Station, Garston, Watford, U.K., 1974.
- [42] FEMA-274. NEHRP Commentary on the Guidelines for the Seismic Rehabilitation of Buildings, Washington (DC), Federal Emergency Management Agency, 1997.
- [43] FEMA-306. Evaluation of earthquake damaged concrete and masonry wall buildings: basic procedures manual, Washington (DC), Federal Emergency Management Agency, 1998.
- [44] P.G. Asteris, Lateral stiffness of brick masonry infilled plane frames. *ASCE Journal of Structural Engineering*, **129** (8), 1071-1079, 2003.

- [45] SeismoSoft. *SeismoStruct 2016 - A computer program for static and dynamic nonlinear analysis of framed structures*. Seismosoft Ltd., Pavia, Italy. <http://www.seismosoft.com> [09 February 2016].
- [46] J.B. Mander, M.J.N. Priestley, R. Park, Theoretical stress-strain model for confined concrete. *ASCE Journal of structural engineering*; **114** (8), 1804–1826, 1988.
- [47] J.E. Martinez-Rueda, A.S. Elnashai, Confined concrete model under cyclic load. *Materials and Structures*; **30** (3), 139-147, 1997.
- [48] M. Menegotto, P.E. Pinto, Method of analysis for cyclically loaded R.C. plane frames including changes in geometry and non-elastic behaviour of elements under combined normal force and bending. *Symposium on the Resistance and Ultimate Deformability of Structures Acted on by Well Defined Repeated Loads*, International Association for Bridge and Structural Engineering, Zurich, Switzerland, 15-22, 1973.
- [49] F.J. Crisafulli, *Seismic behaviour of reinforced concrete structures with masonry infills*. Ph.D. Dissertation, University of Canterbury, New Zealand, 1997.
- [50] P.G. Asteris, C.C. Repapis, A.K. Tsaris, F. Di Trapani, L. Cavaleri, Parameters affecting the fundamental period of infilled RC frame structures. *Earthquakes and Structures*, **9**(5), 999-1028, 2015.
- [51] P.G. Asteris, C.C. Repapis, E.V. Repapi, L. Cavaleri, Fundamental period of infilled reinforced concrete frame structures. *Structure and Infrastructure Engineering*, 1-13, 2016.